

EN



Wiha – Electrotechnical accessories



One packaging. Multiple ways of use!



...in stock



...on the double hook



...on the shelf



...on the counter



Advantages for the buyer

Facilitates your handling: Focuses on the relevant information with distinctive icon language. **Saves time:** Quick selection of the required articles when buying, in the workshop and on the construction site. **Saves time:** Reduces the risk of incorrect article selection. **Saves time:** Simple selection of the required sizes. **Simplifies your work:** Concept with recognition values across all articles. "

Advantages for the dealer

Increases your flexibility: One package - 4 possibilities: - On the shelf - On the double hook - On the counter - In the warehouse. **Facilitates your handling:** No separate storage system required - Storage-ready packaging including all relevant information. **Saves time:** Optimum use of space in small parts storage thanks to two carton sizes.

For a safe connection. Quick orientation guaranteed!

Wire end ferrules with plastic collar

mm ²	mm	↓	⌘	Colour code 1 (FR)		Colour code 2 (DE)		Colour code DIN**	
				⚡	Order-No.	⚡	Order-No.	⚡	Order-No.
0,14	6	100	40		brown• 43908		grey• 43920		
0,25	6	100	40		purple• 43909		light blue• 43921		
0,34	6	100	40		light pink• 43910		turquoise• 43922		
0,50	8	100	40		white 43911		orange 43923		white 43911
0,75	8	100	40		blue 43912		white 43924		grey 43996
1,00	8	100	60		red 43913		yellow 43925		red 43913
1,50	8	100	60		black 43914		red 43926		black 43914
2,50	8	100	50		grey 43915		blue 43927		blue 43927
4,00	10	100	30		orange 43916		grey 43928		grey 43928
6,00	12	100	20		green 43917		black 43929		yellow 43932
10,00	12	50	20		brown 43918		ivory 43930		red 43933
16,00	12	50	20		ivory 43919		green 43931		blue 43934

•Complementary size to the DIN dimensions

Twin wire end ferrules with plastic collar

mm ²	mm	↓	⌘	Colour code 1 (FR)		Colour code 2 (DE)		Colour code DIN**	
				⚡	Order-No.	⚡	Order-No.	⚡	Order-No.
2 x 0,50	8	100	30		white 43935		orange 43943		white 43935
2 x 0,75	8	100	20		blue 43936		white 43944		grey 43951
2 x 1,00	8	100	20		red 43937		yellow 43945		red 43937
2 x 1,50	8	100	30		black 43938		red 43946		black 43938
2 x 2,50	10	100	20		grey 43939		blue 43947		blue 43947
2 x 4,00	12	50	20		orange 43940		grey 43948		grey 43948
2 x 6,00	14	50	15		green 43941		black 43949		yellow 43952
2 x 10,00	14	25	20		brown 43942		ivory 43950		red 43953



Terminals ring type insulated

mm ²	Ømm	↓	⌘	⚡	Order-No.
0,5-1,0	M4	100	15		red 43954
0,5-1,0	M5	100	15		red 43956
0,5-1,0	M6	100	15		red 43958
1,5-2,5	M4	100	15		blue 43955
1,5-2,5	M5	100	15		blue 43957
1,5-2,5	M6	100	15		blue 43959
4,0-6,0	M6	50	15		yellow 43960
4,0-6,0	M8	50	15		yellow 43961

Terminals fork type insulated

mm ²	Ømm	↓	⌘	⚡	Order-No.
0,5-1,0	M4	100	15		red 43962
1,5-2,5	M4	100	15		blue 43963
4,0-6,0	M5	50	15		yellow 43964

Butt connectors, insulated

mm ²	↓	⌘	⚡	Order-No.
0,5-1,0	100	15		red 43965
1,5-2,5	100	15		blue 43966
4,0-6,0	50	15		yellow 43967

Female blade connectors, insulated


mm ²	mm	↓	⌘	⚡	Order-No.
0,5-1,0	6,3 x 0,8	100	15		red 43968
1,5-2,5	6,3 x 0,8	100	15		blue 43969
4,0-6,0	6,3 x 0,8	50	15		yellow 43970

Female blade connectors, fully insulated


mm ²	mm	↓	⌘	⚡	Order-No.
0,5-1,0	6,3 x 0,8	100	15		red 43971
1,5-2,5	6,3 x 0,8	100	15		blue 43972
4,0-6,0	6,3 x 0,8	50	15		yellow 43973

Male blade connectors, insulated

mm ²	mm	↓	⌘	⚡	Order-No.
0,5-1,0	6,3 x 0,8	100	15		red 43974
1,5-2,5	6,3 x 0,8	100	15		blue 43975
4,0-6,0	6,3 x 0,8	50	15		yellow 43976



155 x 95 x 95 mm





310 x 95 x 95 mm

- **Increases your process safety:** Consistently high processing quality for permanent safe contact.
- **Makes handling easier:** Quick, easy cable insertion thanks to funnel sleeve.
- **Increases your safety:** Cable breakages prevented thanks to protected individual wires. High thermal resistance up to 105 °C.

For a safe connection. Compact sets for mobile use!

Wire end sleeves with plastic collar set 0,5 – 2,5 mm²


mm ²	mm	↓	🏠	Colour code 1 (FR)		Colour code 2 (DE)		Colour code DIN**				
				⚡	Order-No.	⚡	Order-No.	⚡	Order-No.			
0,50	8	50	8		white		orange		white	43900	43902	43904
0,75	8	100			blue		white		grey			
1,00	8	100			red		yellow		red			
1,50	8	100			black		red		black			
2,50	8	50			grey		blue		blue			

Twin wire end sleeves with plastic collar set 0,75 – 2,5 mm²




mm ²	mm	↓	🏠	Colour code 1 (FR)		Colour code 2 (DE)		Colour code DIN**				
				⚡	Order-No.	⚡	Order-No.	⚡	Order-No.			
2 x 0,75	8	50	8		blue		white		grey	43905	43906	43907
2 x 1,00	8	50			red		yellow		red			
2 x 1,50	8	50			black		red		black			
2 x 2,50	8	50			grey		blue		blue			

Wire end sleeves with plastic collar set 4 – 16 mm²




mm ²	mm	↓	🏠	Colour code 1 (FR)		Colour code 2 (DE)		Colour code DIN**				
				⚡	Order-No.	⚡	Order-No.	⚡	Order-No.			
4,00	10	50	8		orange		grey		grey	43899	43901	43903
6,00	12	20			green		black		yellow			
10,00	12	20			brown		ivory		red			
16,00	12	10			ivory		green		blue			

- **Increases your process safety:** Consistently high processing quality for permanent safe contact.
- **Makes handling easier:** Quick, easy cable insertion thanks to funnel sleeve.
- **Increases your safety:** Cable breakages prevented thanks to protected individual wires. High thermal resistance up to 105 °C.



**Compact and clear.
Quick orientation guaranteed!**















Countertop display

Easy to set up and ready for sale on the counter in just a few steps.

	Order-No.
Colour code 1 (FR)	44005
Colour code 2 (DE)	44006
Colour code DIN	44007



Each equipped with:

	Number	Content	
	8	0,50 - 2,50 mm ²	1x 
	8	4,00 - 16,00 mm ²	1x 
	80	0,50 mm ²	2x 
	80	0,75 mm ²	2x 
	60	1,00 mm ²	1x 
	60	1,50 mm ²	1x 
	50	2,50 mm ²	1x 
	30	4,00 mm ²	1x 
	20	6,00 mm ²	1x 
	20	10,00 mm ²	1x 

- **Facilitates your handling:** Focuses on the relevant information with distinctive icon language.
- **Saves time:** Simple selection of the required sizes.
- **Simplifies your work:** Concept with recognition values across all articles.



For a safe connection. Comprehensive sets for mobile use.

There are many pitfalls in conventional wiring installation. All-too-familiar problems include wires skinned incorrectly, twisted crimps in the pliers or poorly pressed sleeves. The comprehensive set by Wiha provides you with the right professional tools, including a wide selection of the most commonly used connectors and wire end sleeves, clearly arranged in an assortment case for portable use or for vehicles.

Wiha's automatic stripping pliers promise to deliver "Skinning made easy". Users can skin cables ranging between 0.03 and 16 mm² with just one set of pliers.


The automatic crimping pliers with hex crimping can handle wire-end sleeves between 0.08 and 16 mm² and twin wire end sleeves up to 10 mm².

The automatic crimp tool for insulated cable eyes and contacts is designed for a crimping range between 0.5 and 6 mm² and thus covers most applications in the small and medium cable gauge range.

Wiha's standard-compliant wire end sleeves and connectors offer heat resistance up to 105 °C.

- **Increases your efficiency:** Automatic stripping and crimping tool for a wide range of coverage from 0.08 - 16 mm². Comprehensive assortment of wire end ferrules and cable connectors in a clear and mobile assortment box.

- **Increases the quality of your work:** Gas-tight connections thanks to perfect combination of professional tools and high quality connectors.

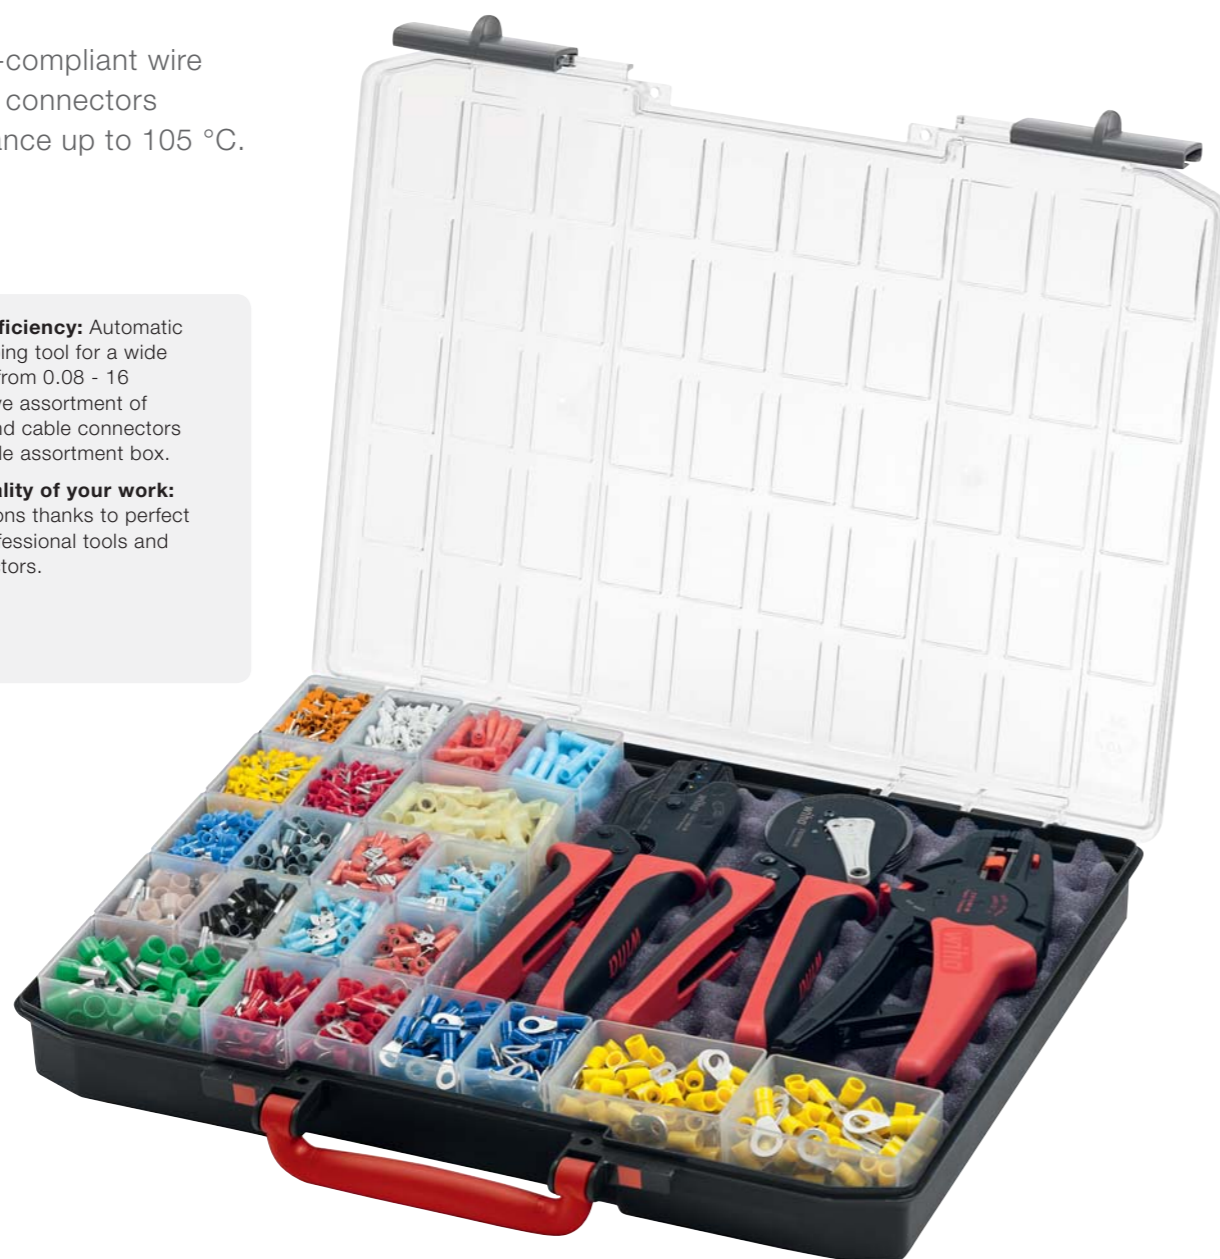

Stripping and crimping tool set 4-pcs.

With connection elements, 2,600 units, in assortment box

	Order-No.
Colour code 1 (FR)	43982
Colour code 2 (DE)	43983
Colour code DIN	43984



Insert boxes set

16-pcs. for assortment box connector elements

Order-No.
43995



Stripping and crimping tool set 5-pcs.

With wire end ferrules, 500 units, in L-Boxx Mini

	Order-No.
Colour code 1 (FR)	43985
Colour code 2 (DE)	43986
Colour code DIN	43987



- **Increases the quality of your work:** Gas-tight connections thanks to perfect combination of professional tools and high quality connectors.
- **Increases your efficiency:** Automatic stripping and crimping tool for a wide range of coverage from 0.08 - 16 mm².
- **Simplifies your work:** Simple removal and safe storage thanks to dispenser with latching stud key fastener.
- **Increases your efficiency:** Ideal for carrying around thanks to the compact, stackable dispenser.



0,5 - 2,5 mm²



4 - 16 mm²

For a safe connection. For clean cable ends.

Automatic crimp tool

- **Lowers your costs:** An integrated lever enables users to interrupt the crimping process at any time to protect the pliers.
- **Increases your safety:** Safe work through feed aid prevents crimping the plastic cover of wire-end sleeves.
- **Makes handling easier:** Thanks to hexagonal crimping, small wire-end sleeves no longer get caught.
- **Increases your efficiency:** Automatic adjustment of wire-end sleeve size with suitable crimping force for a large coverage area of 0.08-16mm².



for wire-end sleeves hex crimping

Order-No.	mm	mm ²	AWG
41246	210	0,08-16	28-8

For processing twin sleeves and wire-end sleeves with or without insulating collar as per DIN 46228 & EN 50027

Crimp tool



for wire-end sleeves

Order-No.	mm	mm ²	AWG
33844	220	0,14-16	26-5

For processing wire-end sleeves with and without insulating collar as per DIN 46228, EN 50027.



for insulated cable eyes and contacts

Order-No.	mm	mm ²	AWG
33841	220	0,5-6	20-10

For processing of red, blue and yellow isolated cable eyes, pin-end cable connectors, contact pins, contact pin sleeves, circular pins, circular pin sleeves, batch connectors and parallel connectors according to DIN 46234.

- **Lowers your costs:** Safe working through automatic pressing adjustment.

Stripping tool automatic

- **Lowers your costs:** Long-lasting and robust thanks to metal blade insert.
- **Protect your health:** Damper enclosed for large cable cross-sections to reduce recoil and protect wrists.
- **Saves time:** Blades quickly exchanged by immediately available replacement blades in the handle.



up to 16 mm² in blister pack

Order-No.	mm	mm ²	AWG
42062	200	0,03-16	32-5

